

220-240V
50/60 HzIK
10IP
66

Park luminaire in modern form for LED light sources.

TECHNICAL DATA

Mounting: on pillar $\varnothing 48/60/76$ mm, with mounting bracket (included)

Body: high pressure die-cast aluminum

Lateral Surface Wind Exposed: 0,088 m²

Colour: gray, graphite

Diffuser: polycarbonate

ELECTRICAL DATA

Power supply efficiency: >89%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED, DALI

Electrical connection: luminaire equipped with 2x1,5 mm² wire with a length of 6 m (II class), luminaire equipped with 4x1,5 mm² wire with a length of 6 m (II class)

OPTICAL DATA

Light distribution: omnidirectional

Way of lighting: direct

Type of optic: O17 - for pedestrian zones

GENERAL DATA

Lifetime (L80B10): 75 000 h

Available on request: DALI, LLOC, twilight sensor, 10kV surge protection, NTC

Other remarks: the pole is not part of the luminaire

Warranty: 5 years


Application: avenues, sidewalks, parks, residential, public spaces, playgrounds, promenade, residential area roads



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
13026X.XL012.011	23	2350	102	3000	>80	-40 ... +55
13026X.XL022.011	23	2500	109	4000	>80	-40 ... +55
13026X.XL042.011	32	3350	105	3000	>80	-40 ... +55
13026X.XL052.011	32	3500	109	4000	>80	-40 ... +55
13026X.XL072.011	40	4250	106	3000	>80	-40 ... +50
13026X.XL082.011	40	4400	110	4000	>80	-40 ... +50

13026	□	.	□	L012.011
				Type of equipment
			5	ED
			3	DALI
				Colour
			2	gray
			5	graphite

Code	Dimensions [mm] L H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
13026X.XL012.011	360 482	76	18	1	4.4
13026X.XL022.011	360 482	76	18	1	4.4
13026X.XL042.011	360 482	76	18	1	4.4
13026X.XL052.011	360 482	76	18	1	4.4
13026X.XL072.011	360 482	76	18	1	4.4
13026X.XL082.011	360 482	76	18	1	4.4

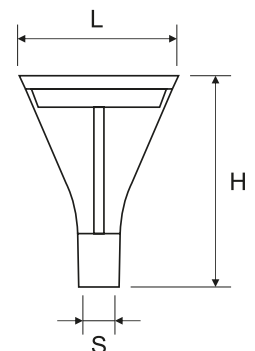

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

OTHER PICTURES**ACCESSORIES**


■ 150175.00983
□ 150172.00968

Cover masking ø48 mm



■ 150175.00982
□ 150172.00966

Cover masking ø60 mm

LIGHT BEAM CURVES**WAY OF LIGHTING**

130262.5L082.011



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.