


MDR APUS 1




Technical data:

| | |
|------------------------------|----------------------------|
| Code | WOJP00231 |
| Power | 40 W |
| Nominal current | 0.165217 mA |
| Voltage | 230 V |
| Energy efficiency class | LED |
| Energy consumption | 40 kWh/1000h |
| Frequency | 50HZ |
| Protection class | I |
| Power supply included | Yes |
| Manufacturer of power supply | TRIDONIC |
| Power factor | 0.93 |
| Luminous flux | 4000 lm |
| Lamp efficacy | 100 lm/W |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 36° |
| RA | >80 |
| Light source included | Yes |
| Producer of LED diodes | CREE |
| Uniformity of color SDCM max | 3 |
| Dimmable | OPC |
| Working temperature range | -20 DO +40 °C |
| Lifespan | 50000 h |
| Material composition | Aluminum, plastic |
| Housing material | Aluminum |
| Degree of protection (IP) | IP20 |
| Colour | Black |
| Dimension (AxBxC) | 0110x135x206 mm |
| For use | WEW |
| Assembly | NA SZYNE 3 FAZOWA/OBWODOWA |
| Application | WEW |
| Made in | PL |

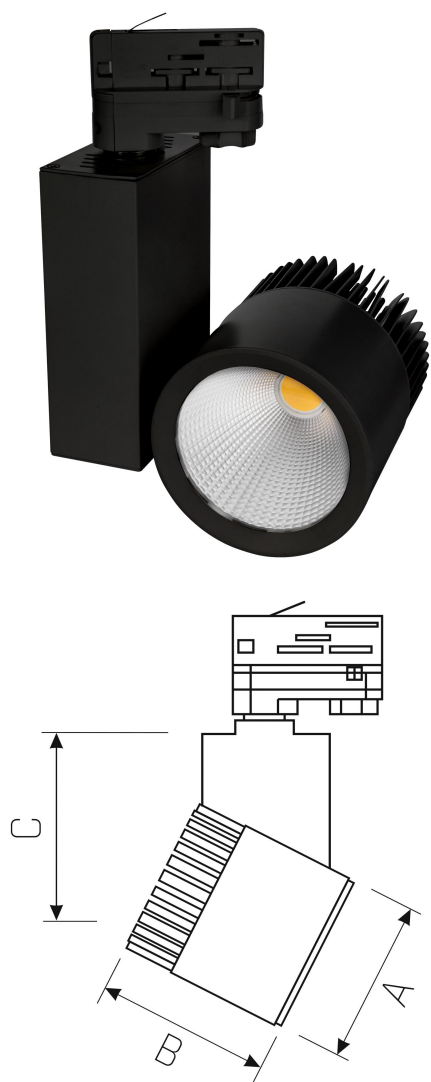


EEL table LED :

MDR APUS 1


 This luminaire contains built-in LED lamps.


The lamps cannot be changed in the luminaire.



A++
A+
A
B
C
D
E
F

LED



 SLI001001 – SLI100001 874/2012